

# NAH 8254

## Pressure Transmitter



### Product description

The pressure transmitter NAH 8254 with increased accuracy of 0.3 % and optional switching outputs has an exceptionally long-term stable thin-film-on-steel sensor cell with triple (optionally 5-fold) overpressure protection. The robust design and the wide temperature range of -40°C to +125°C make the NAH 8254 the ideal solution when pressure needs to be measured accurately and reliably under rough environmental conditions.

### Applications

- Machine tools
- Hydraulics
- Process technology
- Measuring and test bench technology

### Features

- Measuring accuracy 0.3 %
- Completely welded steel sensor system without additional seals
- Excellent long-term stability
- Optional: 5-fold overpressure resistance
- Optional: Switching output 1 or 2 PNP

 EMC: 2014/30/EU

 S.I. 2016 No. 1091

 RoHS/Reach compliant

 UL-listed version

### Technical Data

Measuring principle	Thin-film-on-steel
Measuring range	0 ... 0.2 to 0 ... 1000 bar 0 ... 3 to 0 ... 10000 psi
Output signal	4 ... 20 mA, 0 ... 5 VDC, 1 ... 5 VDC, 1 ... 6 VDC, 0 ... 10 VDC and more, 0.5 ... 4.5 VDC ratiometric, Switching output: 1 or 2 PNP
Media temperature	-40°C ... +125°C
Ambient temperature	max. -40°C ... +125°C (UL-rated Ambient temperature: -20°C ... +80°C) Details see section: Electrical Connection

### Additional information

Data sheet	<a href="http://www.trafag.com/H72304">www.trafag.com/H72304</a>
Flyer	<a href="http://www.trafag.com/H70682">www.trafag.com/H70682</a>
Instructions	<a href="http://www.trafag.com/H73303">www.trafag.com/H73303</a>
Accessories	<a href="http://www.trafag.com/H72258">www.trafag.com/H72258</a>
Video	<a href="https://youtu.be/CyN6xyg-A2A">https://youtu.be/CyN6xyg-A2A</a>

# NAH 8254

## Ordering information/Type code

Ordering information/Type code				8254	XX	XX	XX	XX	XX	XX
Measuring range <sup>1)</sup>	Pressure measurement range [bar]	Over pressure [bar]	Burst pressure [bar]	Pressure-measurement-range [psi]	Over pressure [psi]	Burst pressure [psi]				
	0 ... 0.2 <sup>2)</sup>	1.2	25	<b>68</b>	0 ... 3 <sup>2)</sup>	15	350	<b>F8</b>		
	0 ... 0.4 <sup>2)</sup>	1.2	25	<b>69</b>	0 ... 5 <sup>2)</sup>	15	350	<b>F9</b>		
	0 ... 0.6 <sup>2)</sup>	1.2	25	<b>70</b>	0 ... 10 <sup>2)</sup>	20	350	<b>G0</b>		
	0 ... 1.0 <sup>2)</sup>	2	25	<b>71</b>	0 ... 15 <sup>2)</sup>	30	350	<b>G1</b>		
	0 ... 1.6 <sup>2)</sup>	3.2	50	<b>73</b>	0 ... 25 <sup>2)</sup>	50	700	<b>G3</b>		
	0 ... 2.5	7.5	50	<b>75</b>	0 ... 30	90	700	<b>G5</b>		
	0 ... 4	12	60	<b>76</b>	0 ... 50	150	850	<b>G6</b>		
	0 ... 6	18	100	<b>77</b>	0 ... 100	300	1450	<b>G7</b>		
	0 ... 10	30	200	<b>78</b>	0 ... 150	450	2500	<b>G8</b>		
	0 ... 16	48	200	<b>79</b>	0 ... 200	600	2500	<b>GA</b>		
	0 ... 25	75	300	<b>80</b>	0 ... 250	750	2500	<b>G9</b>		
	0 ... 40	120	300	<b>81</b>	0 ... 300	900	4000	<b>HA</b>		
	0 ... 60	180	400	<b>82</b>	0 ... 400	1200	4000	<b>H0</b>		
	0 ... 100	300	500	<b>83</b>	0 ... 500	1500	4000	<b>H1</b>		
	0 ... 160	480	750	<b>85</b>	0 ... 1000	3000	5000	<b>H2</b>		
	0 ... 250	750	1000	<b>74</b>	0 ... 1500	4500	7000	<b>H3</b>		
	0 ... 400	1000	2000	<b>84</b>	0 ... 2000	6000	10000	<b>H5</b>		
	0 ... 600	1500	2500	<b>86</b>	0 ... 3000	9000	14500	<b>G4</b>		
	0 ... 700	1500	2500	<b>87</b>	0 ... 5000	12500	21750	<b>H4</b>		
	0 ... 1000	1500	2500	<b>88</b>	0 ... 7500	18750	29000	<b>H6</b>		
					0 ... 10000	18750	29000	<b>H7</b>		
	Option 5P: Fivefold overpressure				Option: Maximum Overpressure					
	0 ... 2.5	12.5	60	<b>55</b>	0 ... 30	150	1450	<b>E5</b>		
	0 ... 4	20	100	<b>56</b>	0 ... 50	180	1450	<b>E6</b>		
	0 ... 6	30	200	<b>57</b>	0 ... 100	450	3500	<b>E7</b>		
	0 ... 10	50	200	<b>58</b>	0 ... 150	700	4250	<b>E8</b>		
	0 ... 16	80	300	<b>59</b>	0 ... 200	700	4250	<b>EA</b>		
	0 ... 25	125	300	<b>60</b>	0 ... 250	1150	5750	<b>E9</b>		
	0 ... 40	200	400	<b>61</b>	0 ... 300	1150	5750	<b>FA</b>		
	0 ... 60	300	500	<b>62</b>	0 ... 400	1800	8500	<b>F0</b>		
	0 ... 100	500	750	<b>63</b>	0 ... 500	1800	8500	<b>F1</b>		
	0 ... 160	800	1000	<b>65</b>	0 ... 1000	4600	19000	<b>F2</b>		

**Sensor**

Relative pressure, accuracy: 0.3 %

23

	8254	XX	XX	XX	XX	XX	XX
<b>Pressure connection</b>	G1/4" male, Seal: DIN 3869						17
	G1/4" male, with integrated damping Ø 0.5 mm, Seal: DIN 3869 <sup>3)</sup>						15
	G1/4" male (Manometer) EN 837						53
	G1/8" male DIN3852-E <sup>4)</sup>						54
	1/4" NPT male						30
	1/8" NPT male <sup>5)</sup>						43
	7/16"-20UNF female, SAE J512 with valve opener <sup>6)</sup>						24
	7/16"-20UNF female, SAE J512 without valve opener <sup>6)</sup>						44
	7/16"-20UNF male, DIN3866 <sup>6)</sup>						18
	7/16"-20UNF-2A male, SAE J1926-2 (Heavy Duty) <sup>7)</sup>						69
	9/16"-18UNF-2A male, SAE J1926-2 (Heavy Duty) <sup>7)</sup>						67
	R1/4" male, DIN3858						19
	R1/4" male, DIN2999 <sup>8)</sup>						20
	R1/8" male, DIN3858 <sup>4)</sup>						16
	M10x1 male, DIN EN ISO 6149-2 <sup>9)</sup>						32
	M10x1 male, ISO 9974-2 <sup>10)</sup>						70
	M12x1 male, DIN EN ISO 6149-2 <sup>11)</sup>						64
	M12x1.25 male, DIN EN ISO 6149-2 <sup>11)</sup>						65
	M12x1.5 male, DIN EN ISO 9974-2						49
	M14x1.5 male DIN EN ISO 6149-2 <sup>8)</sup>						31
<b>Electrical connection</b>	Male electrical connector, industrial standard, contact distance 9.4 mm, Mat. PA, EN 175301-803C						01
	Male electrical connector M12x1, 4-pole, Mat. PA, IEC 61076-2-101						32
	Male electrical connector M12x1, 5-pole, Mat. PA, IEC 61076-2-101						35
	Male electrical connector MIL-C 26482, 6-pole, metal						02
	Male electrical connector Deutsch DT04-3P, 3-pole						D3
	Male electrical connector Deutsch DT04-4P, 4-pole						D4
	Cable Mat. PVC, IP67/IP68, 2 x 2 x 0.14 mm <sup>2</sup> , max. traction on cable: 2 N <sup>12)</sup>						22
	Cable Mat. PUR, IP67/IP68, 4 x 0.25 mm <sup>2</sup> , shielded <sup>12)</sup>						24
	Cable Mat. EPD Raychem FDR25, IP67, 4 x 0.2 mm <sup>2</sup> , shielded <sup>12)</sup>						08
	Cable Mat. Radox Tenuis, IP67/IP68, 4 x 0.5 mm <sup>2</sup> , shielded <sup>12)</sup>						88
	Compact design: Cable Mat. PVC, IP40, 2 x 2 x 0.14 mm <sup>2</sup> , shielded, max. traction on cable: 2 N <sup>8)13)</sup>						A1
	ST (or compatible) Board to Cable/Wire Disconnectable Crimp style connector, BM04B-SRSS-TB, IP20, 4-pole <sup>8)</sup>						J4

					8254	XX	XX	XX	XX	XX	XX
Output signal	Output signal	Load resistance	I (supply)	U (supply)							
		4 ... 20 mA	See graphic	(= signal output)	24 (9 ... 32) VDC						
	0.5 ... 4.5 VDC	$\geq 5.0 \text{ k}\Omega$ to $U_s$ -	$\leq 20 \text{ mA}$	24 (9 ... 32) VDC							20
	0 ... 5 VDC	$\geq 5.0 \text{ k}\Omega$ to $U_s$ -	$\leq 20 \text{ mA}$	24 (9 ... 32) VDC							14
	0.1 ... 4.1 VDC	$\geq 5.0 \text{ k}\Omega$ to $U_s$ -	$\leq 20 \text{ mA}$	24 (9 ... 32) VDC							28
	0.1 ... 5.1 VDC	$\geq 5.0 \text{ k}\Omega$ to $U_s$ -	$\leq 20 \text{ mA}$	24 (9 ... 32) VDC							29
	0.5 ... 5 VDC	$\geq 5.0 \text{ k}\Omega$ to $U_s$ -	$\leq 20 \text{ mA}$	24 (9 ... 32) VDC							22
	1 ... 5 VDC	$\geq 5.0 \text{ k}\Omega$ to $U_s$ -	$\leq 20 \text{ mA}$	24 (9 ... 32) VDC							25
	0.5 ... 5.5 VDC	$\geq 5.0 \text{ k}\Omega$ to $U_s$ -	$\leq 20 \text{ mA}$	24 (9 ... 32) VDC							24
	1 ... 6 VDC	$\geq 5.0 \text{ k}\Omega$ to $U_s$ -	$\leq 20 \text{ mA}$	24 (9 ... 32) VDC							16
	0 ... 10 VDC	$\geq 5.0 \text{ k}\Omega$ to $U_s$ -	$\leq 15 \text{ mA}$	24 (15 ... 32) VDC							17
	1 ... 10 VDC	$\geq 5.0 \text{ k}\Omega$ to $U_s$ -	$\leq 15 \text{ mA}$	24 (15 ... 32) VDC							26
	0.1 ... 10.1 VDC	$\geq 5.0 \text{ k}\Omega$ to $U_s$ -	$\leq 15 \text{ mA}$	24 (15 ... 32) VDC							13
	0.5 ... 4.5 VDC ratiom.	$\geq 5.0 \text{ k}\Omega$ to $U_s$ -	$\leq 10 \text{ mA}$	5 (4.75 ... 5.25) VDC							23
	2 PNP Transistoren <sup>14)</sup>		$\leq 10 \text{ mA}$	24 (9 ... 32) VDC							PS
	1 PNP Transistor <sup>15)</sup>		$\leq 10 \text{ mA}$	24 (9 ... 32) VDC							T1
Accessories	Female electrical plug M12x1, 5-pole <sup>16)</sup>										33
	Female electrical plug industrial standard (for electrical connection 01), EN 175301-803C										34
	Pressure peak damping element $\varnothing$ 1.0 mm										40
	Pressure peak damping element $\varnothing$ 0.4 mm										44
	Seal FKM, -18°C ... +125°C										61
	Seal EPDM, -40°C ... +125°C										63
	Seal NBR, -25°C ... +100°C										83
	Cable length 0.5 m										EM
	Cable length 1.0 m										1M
	Cable length 2.0 m										2M
	Parameterization standard for output signal PS, T1 (see table: Parameters)										ZS
	Parameterization according to customer specification for output signal PS, T1 (see table: Parameters)										ZC
	Multiple packaging <sup>17)</sup>										VM
	UL-listed, see table: Possible combinations for UL-listed variants										UL
	Enhanced condensation protection										CP
	Signal processing, cut-off frequency, see table: Signal processing										
Pin configuration, see table: Electrical connection											

<sup>01)</sup> Customized pressure ranges, upon request

<sup>02)</sup> Only for pressure connections 15, 17 and 30 and with output signal 4 ... 20 mA, code 19

<sup>03)</sup> For measuring ranges  $\geq 2.5$  bar

<sup>04)</sup> max. allowable pressure range 160 bar (2320 psi) at 480 bar (6961 psi) overpressure

<sup>05)</sup> max. allowable pressure range 400 bar (5800 psi) at 600 bar (8700 psi) overpressure

<sup>06)</sup> max. allowable pressure range 60 bar (870 psi) at 180 bar (2610 psi) overpressure

<sup>07)</sup> Measuring range max. 630 bar according to SAE J1926-2 (Heavy Duty)

<sup>08)</sup> Upon request, whereas minimum order quantities may apply

<sup>09)</sup> max. allowable pressure range 250 bar (3626 psi) at 750 bar (10878 psi) overpressure

<sup>10)</sup> max. pressure range 0 .. 160 bar, overpressure 480 bar

<sup>11)</sup> Without seal, use seal geometry according DIN EN ISO 6149-2

<sup>12)</sup> Cable length, see Accessories

<sup>13)</sup> Cable length 2m only, with accessory 2M

<sup>14)</sup> Only with electrical connections 32, 22, 24, 08, 88

<sup>15)</sup> Only with electrical connections 32, 22, 24, 08, 88, D3

<sup>16)</sup> For electrical connections 32 and 35

<sup>17)</sup> The order quantity must be a multiple of 50, only for electrical connections 01, 32, 35, 02, D3, D4, not for pressure connection 30 with electrical connections 02, D3, D4

## Compatibility matrix pressure connection and accessories

Code	Pressure connection	Damping		Seal		
		Ø 1.0 mm (Code 40)	Ø 0.4 mm (Code 44)	FKM (Code 61)	EPDM (Code 63)	NBR (Code 83)
17	G1/4" male, Seal: DIN 3869	✓	✓	✓	✓	✓
15	G1/4" male, with integrated damping Ø 0.5 mm, Seal: DIN 3869			✓	✓	✓
53	G1/4" male (Manometer) EN 837					
54	G1/8" male DIN 3852-E	✓	✓	✓	✓	
30	1/4" NPT male	✓	✓			
43	1/8" NPT male	✓	✓			
24	7/16"-20UNF female, SAE J512 with valve opener					
44	7/16"-20UNF female, SAE J512 without valve opener					
18	7/16"-20UNF male, DIN 3866					
69	7/16"-20UNF-2A male, SAE J1926-2 (Heavy Duty)	✓	✓	✓	✓	
67	9/16"-18UNF-2A male, SAE J1926-2 (Heavy Duty)	✓	✓	✓	✓	
19	R1/4" male, DIN 3858	✓	✓			
20	R1/4" male, DIN 2999	✓	✓			
16	R1/8" male, DIN 3858	✓	✓			
32	M10x1 male, DIN EN ISO 6149-2	✓	✓	✓		
70	M10x1 male, ISO 9974-2	✓	✓	✓		
64	M12x1 male, DIN EN ISO 6149-2	✓	✓			
65	M12x1.25 male, DIN EN ISO 6149-2	✓	✓			
49	M12x1.5 male, DIN EN ISO 9974-2	✓	✓	✓		
31	M14x1.5 male DIN EN ISO 6149-2	✓	✓	✓		

## Ordering information: Possible type code combinations for UL-listed versions

	Combination with UL
Measuring range	All ranges on datasheet
Sensor	All codes on datasheet
Pressure connection	All codes on datasheet
Electrical connection	All codes on datasheet
Output signal	All codes except PS and T1
Accessories	All codes except GA, GS and GU

## Signal processing

Code	Cut-off frequency $f_G$	Rise time (10 ... 90 % nominal pressure)	Output signal			
			4 ... 20 mA	0.5 ... 4.5 VDC ratiometric	0 ... 6 VDC	0 ... 10 VDC
GA <sup>1)</sup>	11 Hz	32 ms	x	x	-	-
GS <sup>1) 2)</sup>	14 kHz	29 $\mu$ s	x	-	-	-
GU <sup>1) 2)</sup>	20 kHz	18 $\mu$ s	-	x	-	-
Standard specification	350 Hz	1 ms	x	x	x	x

<sup>1)</sup> Upon request, whereas minimum order quantities may apply

<sup>2)</sup> Only with electrical connections 32, 35 with shielded cable and 22, 24, 08, 88, only for pressure ranges  $\geq 2$  bar

## Standard configurations

Product No.	Type Code	Pressure range [bar]	Overpressure max. [bar]	Supply [VDC]	Accuracy @ 25°C typ. [%]
NAH0.2A	8254 68 2317 32 0000 0000 19 33 44 61	0 ... 0.2	1.2	9 ... 32	± 0.8
NAH0.4A	8254 69 2317 32 0000 0000 19 33 44 61	0 ... 0.4	1.2	9 ... 32	± 0.8
NAH0.6A	8254 70 2317 32 0000 0000 19 33 44 61	0 ... 0.6	1.2	9 ... 32	± 0.8
NAH1.0A	8254 71 2317 32 0000 0000 19 33 44 61	0 ... 1.0	2	9 ... 32	± 0.6
NAH1.6A	8254 73 2317 32 0000 0000 19 33 44 61	0 ... 1.6	3.2	9 ... 32	± 0.6
NAH2.5A	8254 75 2317 32 0000 0000 19 33 44 61	0 ... 2.5	7.5	9 ... 32	± 0.3
NAH4.0A	8254 76 2317 32 0000 0000 19 33 44 61	0 ... 4	12	9 ... 32	± 0.3
NAH6.0A	8254 77 2317 32 0000 0000 19 33 44 61	0 ... 6	18	9 ... 32	± 0.3
NAH10.0A	8254 78 2317 32 0000 0000 19 33 44 61	0 ... 10	30	9 ... 32	± 0.3
NAH16.0A	8254 79 2317 32 0000 0000 19 33 44 61	0 ... 16	48	9 ... 32	± 0.3
NAH25.0A	8254 80 2317 32 0000 0000 19 33 44 61	0 ... 25	75	9 ... 32	± 0.3
NAH40.0A	8254 81 2317 32 0000 0000 19 33 44 61	0 ... 40	120	9 ... 32	± 0.3
NAH100.0A	8254 83 2317 32 0000 0000 19 33 44 61	0 ... 100	300	9 ... 32	± 0.3
NAH250.0A	8254 74 2317 32 0000 0000 19 33 44 61	0 ... 250	750	9 ... 32	± 0.3
NAH400.0A	8254 84 2317 32 0000 0000 19 33 44 61	0 ... 400	1000	9 ... 32	± 0.3
NAH600.0A	8254 86 2317 32 0000 0000 19 33 44 61	0 ... 600	1500	9 ... 32	± 0.3

## Parameters of switching output

Name	Standard setting (accessory ZS)	Value range	Short name	Customer adjustment (accessory ZC)
Switch point SP1 (hysteresis mode) Upper switch point FH1 (window mode)	75 % Measuring range	> RP1, FL1 (2 ... 99 %) Hysteresis $\geq$ 1 % FS	SP1	
Reset point RP1 (hysteresis mode) Lower switch point FL1 (window mode)	25 % Measuring range	< SP1, FH1 (1 ... 98 %) Hysteresis $\geq$ 1 % FS	RP1	
Switch point SP2 (hysteresis mode) Upper switch point FH2 (window mode)	75 % Measuring range	> RP2, FL2 (2 ... 99 %) Hysteresis $\geq$ 1 % FS	SP2	
Reset point RP2 (hysteresis mode) Lower switch point FL2 (window mode)	25 % Measuring range	< SP2, FH2 (1 ... 98 %) Hysteresis $\geq$ 1 % FS	RP2	
Switch point delay time SP1 / RP1 (hysteresis mode) Switch point delay time FH1 / FL1 (window mode)	0	0; approx. 2 <sup>x</sup> [ms], x = 3, 4 ... 16	dS1	
Switch point delay time SP2 / RP2 (hysteresis mode) Switch point delay time FH2 / FL2 (window mode)	0	0; approx. 2 <sup>x</sup> [ms], x = 3, 4 ... 16	dS2	
Functions switching output 1	Hysteresis, closer (Hno)	Hysteresis NO (Hno) Hysteresis NC (Hnc) Window NO (Fno) Window NC (Fnc)	ou1	
Functions switching output 2	Hysteresis, closer (Hno)	Hysteresis NO (Hno) Hysteresis NC (Hnc) Window NO (Fno) Window NC (Fnc) Device ready	ou2	

### **i** Parameterisation of switching points

The switching points, delay times and output functions can be parameterised quickly and easily with the Sensor Master Communicator (SMC) application, which is available for Windows (PC) and Android smartphone. The Android app is available in the Google Play Store and the Windows app is available in the Microsoft Store. The apps are free of charge.

- Data sheet SMI Sensor Master Interface: [www.trafag.com/H72618](http://www.trafag.com/H72618)
- Instruction for the Sensor Master Communicator App (SMC) and the Sensor Master Interface (SMI): [www.trafag.com/H73618](http://www.trafag.com/H73618)



## Specifications

<b>Electrical data</b>	Output / supply voltage	4 ... 20 mA: 24 (9 ... 32) VDC 0 ... 6 VDC ranges: 24 (9 ... 32) VDC 0 ... 10.1 VDC ranges: 24 (15 ... 32) 0.5 ... 4.5 VDC ratiometric: 10 ... 90 % $U_s$ : $5 \pm 0.25$ VDC 1 or 2 PNP transistors: 24 (9 ... 32) VDC
	Rise time of supply voltage	> 32 V/s
	Power-on delay time pressure transmitters	100 ms
	Power-on delay time pressure switches	50 ms + switching delay time
	Inverse-polarity protection, short-circuit strength @ 25°C during 5 min.	4 ... 20 mA: to $U_s = 32$ VDC 0 ... 6 VDC ranges 0 ... 10.1 VDC ranges: to $U_s = 28$ VDC 0.5 ... 4.5 VDC ratiometric: to $U_s = 14$ VDC 1 or 2 PNP transistors: to $U_s = 32$ VDC
	Resistance of insulation	> 10 M $\Omega$ , 50 VDC
	Dielectric strength	50 VAC, 50 Hz
	Current limiting output signal	4 ... 20 mA: 24 mA (Overload)
<b>Environmental conditions</b>	Media temperature	-40°C ... +125°C
	Ambient temperature	max. -40°C ... +125°C (UL-rated Ambient temperature: -20°C ... +80°C) Details see section: Electrical Connection
	Storage temperature	-20°C ... +40°C
	Protection	IP20, IP40, IP65, IP67, IP68 Details see section Electrical Connection
	Humidity	max. 95 % relative
	Vibration	15 g RMS (20 ... 2000 Hz) (EN 60068-2-64) 25 g sin (80 ... 2000 Hz), 1 oct./min, (1x @ 25°C) (EN 60068-2-6)
	Shock	50 g/11 ms 100 g/6 ms Male electrical plug M12x1 (EN 60068-2-27) <sup>2)</sup>
<b>EMC protection <sup>1</sup></b>	Emission	EN/IEC 61000-6-3
	Immunity	EN/IEC 61000-6-2
<b>Mechanical data</b>	Sensor (wetted parts)	1.4542 (AISI 630)
	Pressure connection (wetted parts)	1.4542 (AISI 630)
	Housing	1.4301 (AISI 304)
	Sealing	FKM, EPDM, NBR
	Male electrical connector	See ordering information
	Weight	~ 50 g
	Mounting torque	25 Nm

<sup>1)</sup> Electrical connection J4 not EMC tested

<sup>2)</sup> For electrical connections 32 and 35

## Analogue output


			$\geq 0.2 \text{ bar}$ $\leq 0.6 \text{ bar}$	$> 0.6 \text{ bar}$ $< 2.0 \text{ bar}$	$\geq 2.0 \text{ bar}$
Accuracy	TEB @ -25 ... +85°C	[% FS typ.]	$\pm 2.0$	$\pm 1.5$	$\pm 1.0$
	Accuracy @ +25°C	[% FS typ.]	$\pm 0.8$	$\pm 0.6$	$\pm 0.3$
	NLH @ +25°C (BSL)	[% FS typ.]	$\pm 0.2$	$\pm 0.2$	$\pm 0.2$
	TC zero point and span	[% FS/K typ.]	$\pm 0.02$	$\pm 0.02$	$\pm 0.01$
	Long term stability 1 year @ +25°C	[% FS typ.]	$\pm 0.3$	$\pm 0.2$	$\pm 0.1$
	Mounting dependency with 180° rotation (vibration and shock)	[% FS max.]	0.5 mbar	0.5 mbar	0.5 mbar
Rise time	Typ. 1 ms / 10 ... 90 % nominal pressure				

## Switchpoint accuracy


Accuracy	TEB @ -25 ... +85°C	[% FS typ.]	$\pm 1.0$
	Accuracy @ +25°C	[% FS typ.]	$\pm 0.3$
	Long term stability 1 year @ +25°C	[% FS typ.]	$\pm 0.1$
Setting range of switchpoints	1 ... 99 % FS		
Distance switch point	$\geq 1.0$ % FS		
Switch point > reset point	Switchpoint > reset point		
Switching resistance	$\leq 3 \Omega$		
Output function	Hysteresis, Window; normally closed (NO), normally open (NC)		
Switching current	-40°C ... +85°C	(Ambient and media temperature)	$\leq 400 \text{ mA}$ , total of both switching outputs
	+85°C ... +125°C	(Ambient and media temperature)	$\leq 200 \text{ mA}$ , total of both switching outputs
Current limiting	Integrated		
Lifetime	$> 100 \times 10^6$ cycles		
Delay time	0; approx. $2^x$ [ms], $x = 3, 4 \dots 16$		
Switching frequency	max. 60 Hz (at switching delay time = 0)		

## Measuring accuracy


### $\geq 0.2 \text{ bar} \dots \leq 0.6 \text{ bar}$

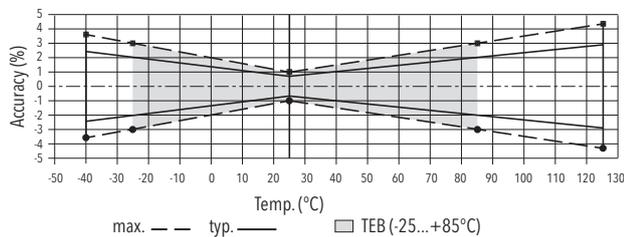

### $> 0.6 \text{ bar} \dots < 2.0 \text{ bar}$

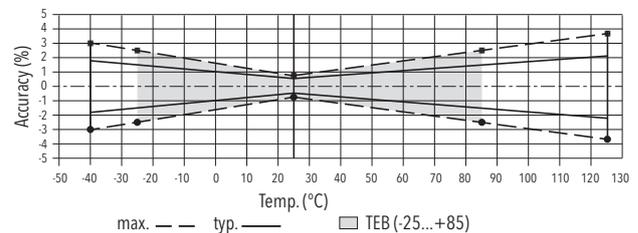


### $\geq 2.0 \text{ bar}$

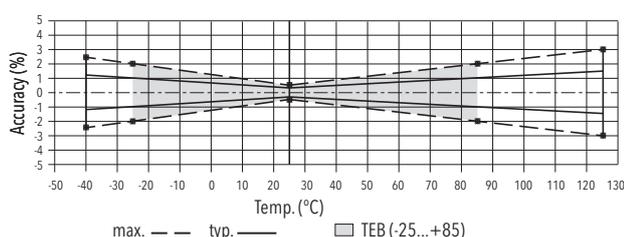


# NAH 8254


## Dimensions

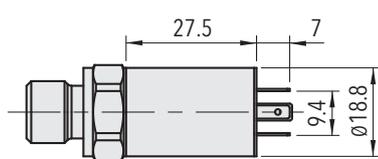


8254.XX.XXXX.01.XX.XX

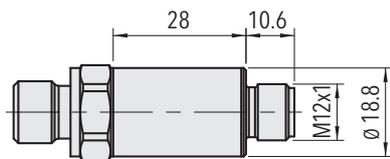


8254.XX.XXXX.32/35.XX.XX

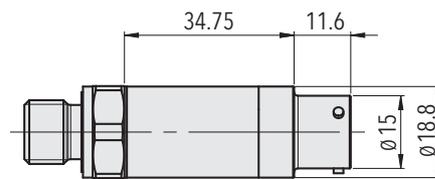


8254.XX.XXXX.02.XX.XX

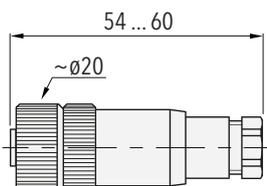


8254.XX.XXXX.XX.XX.33




8254.XX.XXXX.XX.XX.34

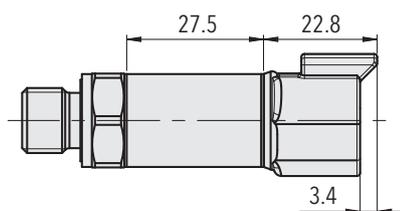


8254.XX.XXXX.D3.XX.XX

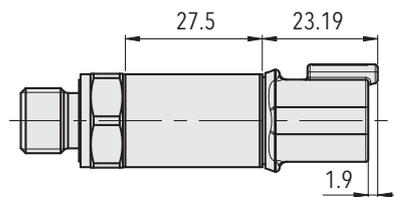


8254.XX.XXXX.D4.XX.XX

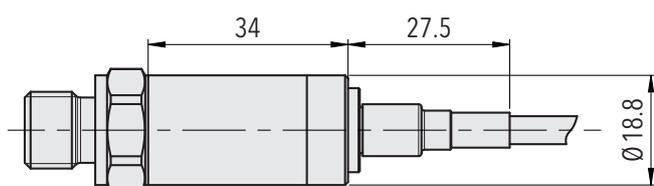


8254.XX.XXXX.08.XX.XX

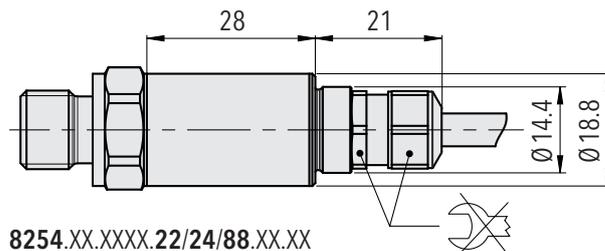

8254.XX.XXXX.22/24/88.XX.XX

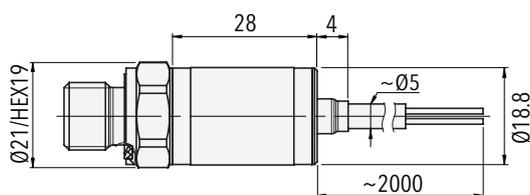


8254.XX.XXXX.A1.XX.XX

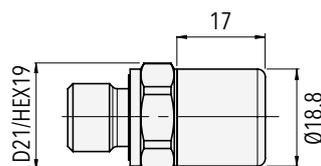


8254.XX.XXXX.J4.XX.XX

# NAH 8254


## Dimensions

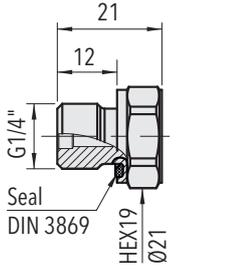


**8254.XX.XX17.XX.XX.XX**

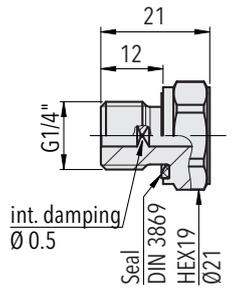


**8254.XX.XX15.XX.XX.XX**

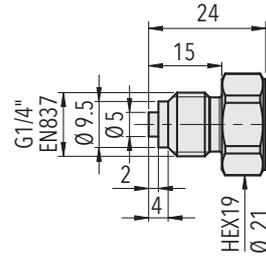


**8254.XX.XX53.XX.XX.XX**

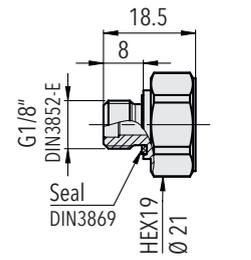


**8254.XX.XX54.XX.XX.XX**

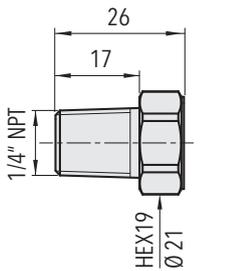


**8254.XX.XX30.XX.XX.XX**

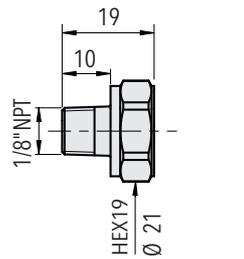


**8254.XX.XX43.XX.XX.XX**

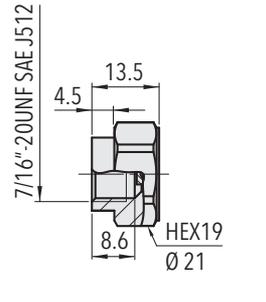


**8254.XX.XX24.XX.XX.XX**

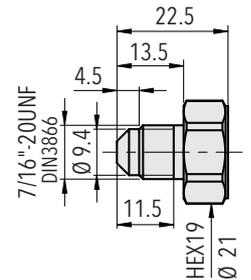


**8254.XX.XX18.XX.XX.XX**

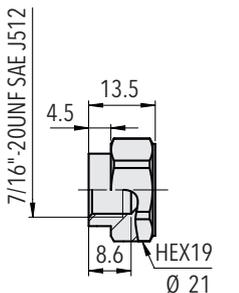


**8254.XX.XX44.XX.XX.XX**




**8254.XX.XX69.XX.XX.XX**

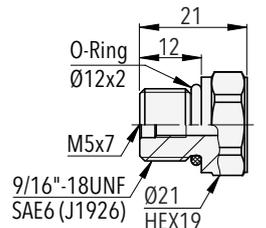


**8254.XX.XX67.XX.XX.XX**

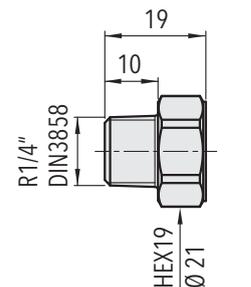


**8254.XX.XX19.XX.XX.XX**

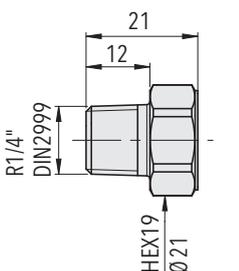


**8254.XX.XX20.XX.XX.XX**

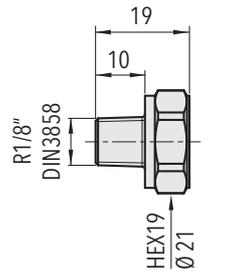


**8254.XX.XX16.XX.XX.XX**

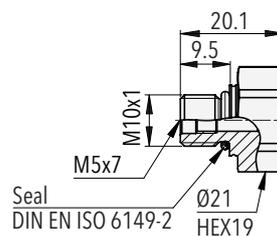


**8254.XX.XX32.XX.XX.XX**

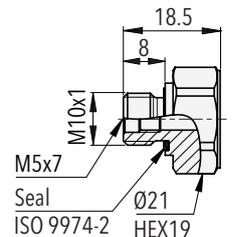


**8254.XX.XXXX.70.XX.XX**

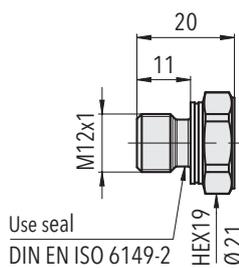


**8254.XX.XX64.XX.XX.XX**

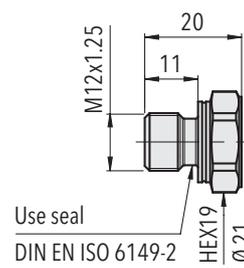

**8254.XX.XX65.XX.XX.XX**

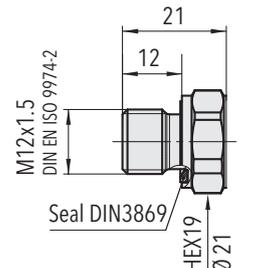

**8254.XX.XX49.XX.XX.XX**

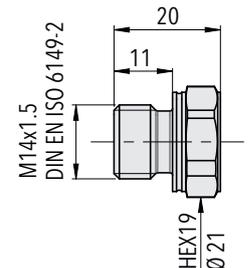

**8254.XX.XX31.XX.XX.XX**



## Electrical connection

	DT04-3P, 3-pole	DT04-4P, 4-pole	Cable	Cable	Cable		
<b>Electrical connection type code</b>	D3	D4	22	24	08		
<b>IP protection</b>	IP67, IP68 <sup>1) 4)</sup>	IP67, IP68 <sup>1) 4)</sup>	IP67, IP68 <sup>2) 3)</sup>	IP67, IP68 <sup>2) 3)</sup>	IP67 <sup>2)</sup>		
<b>Ambient temperature</b>	-40°C ... +125°C	-40°C ... +125°C	-30°C ... +80°C	-40°C ... +70°C	-40°C ... +125°C		
<b>UL-rated ambient temperature</b>	-20°C ... +80°C	-20°C ... +80°C	-20°C ... +80°C	-20°C ... +70°C	-20°C ... +80°C		
<b>Pin assignment type code</b>		<b>F0</b>		<b>G3</b>			
<b>Output signal</b> 8254.xx.xxxx.xx.19 	A B	A C	2 1 3	2 3	White Brown  Yellow	White Brown  Yellow	Red Black  Green
<b>Pin assignment type code</b>		<b>F1</b>		<b>G4</b>			
<b>Output signal</b> 8254.xx.xxxx.xx.13/14/16/17/20/22/23/24/25/26/28/29 	A C B	A B C	2 4 1 3	2 1 3	White Green Brown Yellow	White Green Brown Yellow	Red White Black Green

<sup>1)</sup> Provided female electrical plug is mounted according to instructions

<sup>2)</sup> Ventilation via male electric plug/cable end

<sup>3)</sup> IP68, 20 bar, 30 min.

<sup>4)</sup> IP68, 100 mbar, 4h

**i** Empty 'Pin Assignment Type Code' field: Default pinout

## Electrical connection

	Cable	Cable	JST SH Series
<b>Electrical connection type code</b>	88	A1	J4
<b>IP protection</b>	IP67, IP68 <sup>2) 3)</sup>	IP40	IP20
<b>Ambient temperature</b>	-40°C ... +100°C	-30°C ... +80°C	-40°C ... +125°C
<b>UL-rated ambient temperature</b>	-20°C ... +80°C	-20°C ... +80°C	-20°C ... +80°C
<b>Pin assignment type code</b>			
<b>Output signal</b> 8254.xx.xxxx.xx.19 	Brown Black  Yellow/Green	Brown White  Yellow	1 2  4
<b>Pin assignment type code</b>			
<b>Output signal</b> 8254.xx.xxxx.xx.13/14/16/17/20/22/23/24/25/26/28/29 	Brown Blue Black  Yellow/Green	Brown Green White  Yellow	1 3 2  4

<sup>2)</sup> Ventilation via male electric plug/cable end

<sup>3)</sup> IP68, 20 bar, 30 min.

**i** Empty 'Pin Assignment Type Code' field: Default pinout

## Electrical connection

	M12x1, 4-pole		Cable		Cable	
<b>Electrical connection type code</b>	32		22		24	
<b>IP protection</b>	IP67 <sup>1) 2)</sup>		IP67, IP68 <sup>2) 3)</sup>		IP67, IP68 <sup>2) 3)</sup>	
<b>Ambient temperature</b>	-40°C ... +125°C		-30°C ... +80°C		-40°C ... +70°C	
<b>UL-rated ambient temperature</b>	-20°C ... +80°C		-20°C ... +80°C		-20°C ... +70°C	
<b>Pin assignment type code</b>	<b>PS</b>	<b>T1</b>	<b>PS</b>	<b>T1</b>	<b>PS</b>	<b>T1</b>
<b>Output signal</b> 8254.xx.xxxx.xx.PS/T1						
	1 4 2 3	1 4 - 3	White Green Yellow Brown	White Green - Brown	White Green Yellow Brown	White Green - Brown
	Cable		Cable		DT04-3P, 3-pole	
<b>Electrical connection type code</b>	08		88		D3	
<b>IP protection</b>	IP67 <sup>2)</sup>		IP67, IP68 <sup>2) 3)</sup>		IP67, IP68 <sup>1) 4)</sup>	
<b>Ambient temperature</b>	-40°C ... +125°C		-40°C ... +100°C		-40°C ... +125°C	
<b>UL-rated ambient temperature</b>	-20°C ... +80°C		-20°C ... +80°C		-20°C ... +80°C	
<b>Pin assignment type code</b>	<b>PS</b>	<b>T1</b>	<b>PS</b>	<b>T1</b>	<b>T1</b>	
<b>Output signal</b> 8254.xx.xxxx.xx.PS/T1						
	Red White Green Black	Red White - Black	Brown Blue Yellow/Green Black	Brown Blue - Black	A - C - B	



<sup>1)</sup> Provided female electrical plug is mounted according to instructions

<sup>2)</sup> Ventilation via male electric plug/cable end

<sup>3)</sup> IP68, 20 bar, 30 min.


<sup>4)</sup> IP68, 100 mbar, 4h

4...20mA: min./max resistor vs. supply voltage @ Pmax = 100%

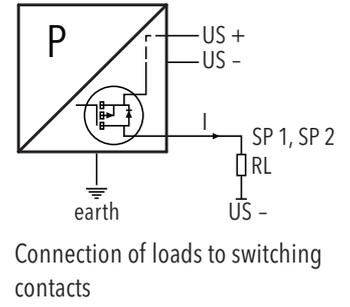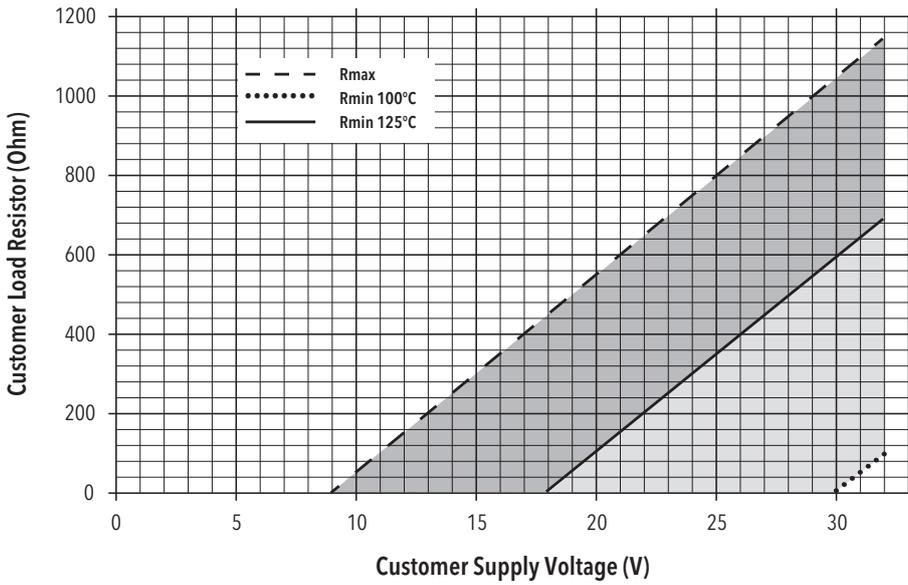


## Functional diagram


Hysteresis

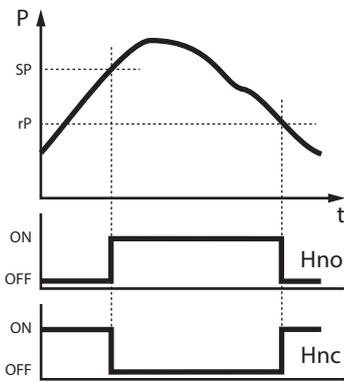

Window

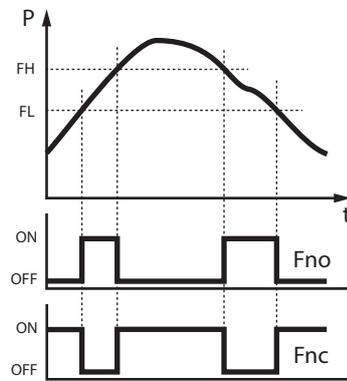

Delay

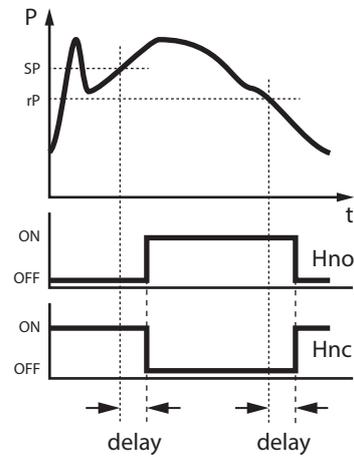

# Reliable quality


## Worldwide represented, globally trusted, Swiss based

Trafag develops, produces and distributes robust, reliable and precise instruments for monitoring pressure, temperature and gas density.

The broad portfolio of pressure and temperature measuring instruments is tailored for use in test benches through to applications in harsh environments. The research and development departments in Switzerland and Germany develop all important components from the sensor to the application-specific microchip, which are

then manufactured in the production facilities in Switzerland, Germany, the Czech Republic, and India. Strict quality management according to ISO 9001 and ISO 14001 ensures that Trafag products meet the required quality and sustainability standards.

Trafag is headquartered in Switzerland, was founded in 1942 and has an extensive sales and service network in more than 40 countries worldwide.

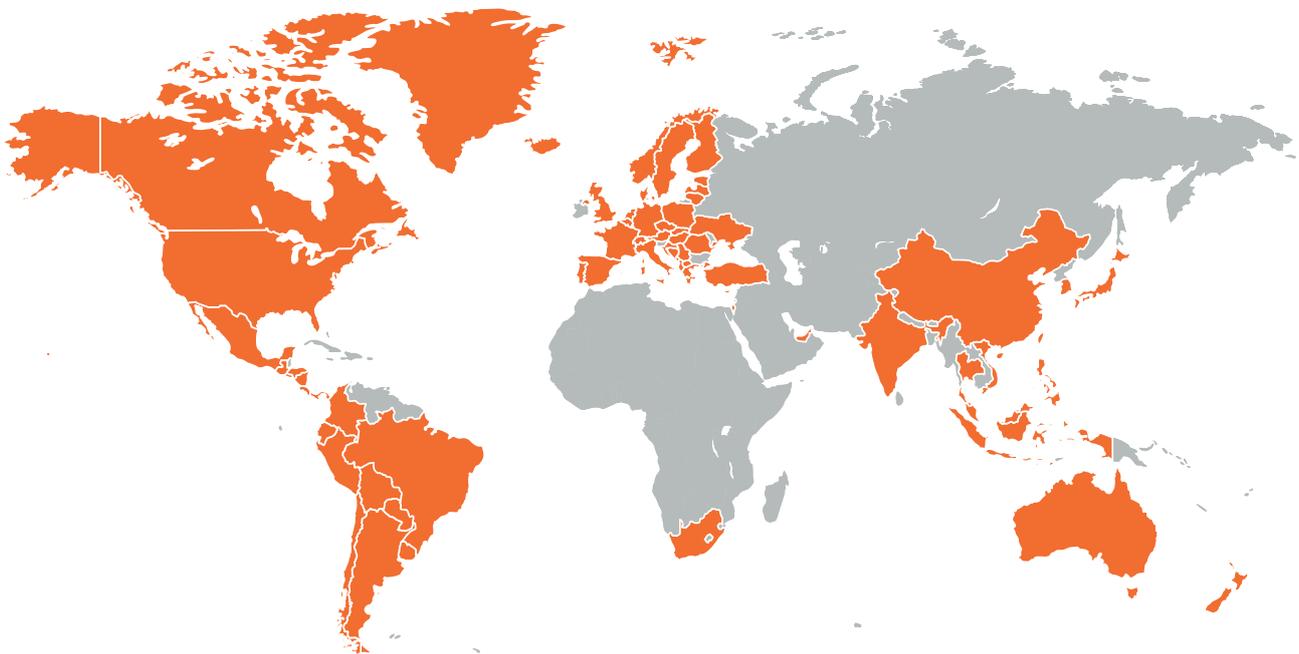

### Headquarters Switzerland

Trafag AG  
Industriestrasse 11  
8608 Bubikon (Switzerland)  
+41 44 922 32 32  
trafag@trafag.com  
www.trafag.com

Coordinates of representatives can be found at [www.trafag.com/trafag-worldwide](http://www.trafag.com/trafag-worldwide)



Pressure transmitters



Electronic pressure switches



Mechanical pressure switches



Pressure gauge



Thermostats



Temperature transmitters



Gas density